


Strand Pattern Designation

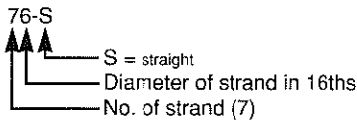


Safe loads shown include dead load of 10 psf for untopped members and 15 psf for topped members. Remainder is live load. Long-time cambers include superimposed dead load but do not include live load.

Capacity of selections of other configurations are similar. For precise values, see local hollow-core manufacturer.

HOLLOW-CORE

4'-0" x 8"
Lightweight Concrete

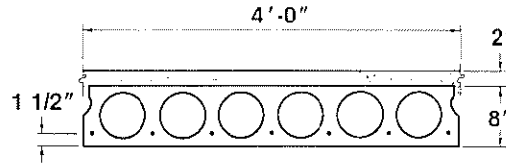

$f'_c = 5,000$ psi
 $f'_{ci} = 3,500$ psi

Section Properties

	Untopped	Topped
A	= 215 in. ²	—
I	= 1,666 in. ⁴	3,529 in. ⁴
y _b	= 4.00 in.	5.70 in.
y _t	= 4.00 in.	4.30 in.
Z _b	= 416 in. ³	619 in. ³
Z _t	= 416 in. ³	821 in. ³
b _w	= 12.00 in.	12.00 in.
wt	= 172 plf	272 plf
	43 psf	68 psf
V/S	= 1.92 in.	

Key

- 346 — Safe superimposed service load, psf
- 0.3 — Estimated camber at erection, in.
- 0.4 — Estimated long-time camber, in.

4LHC8

Table of safe superimposed service load (psf) and cambers

No Topping

Strand Designation Code	Span, ft.																											
	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36					
66-S	346	297	257	224	196	172	152	135	120	107	95	85	76	68	61	55	49	44	39	35								
	0.3	0.3	0.4	0.4	0.4	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.4	0.4	0.3	0.3	0.2	0.1	0.0								
76-S	348	302	263	231	204	181	161	144	129	115	104	93	84	76	68	62	56	50	45	41	36							
	0.4	0.4	0.5	0.5	0.6	0.6	0.6	0.7	0.7	0.7	0.7	0.7	0.7	0.6	0.6	0.6	0.5	0.4	0.3	0.1	-0.1	-0.3	-0.6	-0.9				
58-S	350	325	304	286	265	236	211	189	170	154	139	126	114	104	95	86	79	72	66	60	55	50						
	0.5	0.6	0.7	0.7	0.8	0.8	0.9	0.9	1.0	1.0	1.1	1.1	1.1	1.1	1.1	1.1	1.0	1.0	0.9	0.8	0.7	0.5	0.2	0.0				
68-S	334	313	292	274	258	243	229	206	187	169	154	140	128	117	107	98	90	83	76	70	64							
	0.7	0.8	0.9	1.0	1.1	1.1	1.2	1.3	1.3	1.4	1.5	1.6	1.7	1.7	1.7	1.6	1.6	1.6	1.5	1.4	1.3	1.1	0.9	0.7				
78-S	343	319	301	283	267	249	237	225	212	197	181	165	151	139	127	117	108	100	92	85	78							
	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.7	1.8	1.9	2.0	2.0	2.1	2.1	2.1	2.2	2.2	2.1	2.1	2.0	1.8					

4LHC8 + 2

Table of safe superimposed service load (psf) and cambers

2" Normal Weight Topping

Strand Designation Code	Span, ft.																											
	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38					
66-S	320	277	242	211	186	163	144	127	113	100	88	78	69	60	53	45												
	0.4	0.4	0.4	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.4	0.4	0.3	0.3	0.2	0.0	-0.1	-0.3	-0.5	-0.7	-1.0						
76-S	327	286	251	222	196	174	155	138	123	109	98	87	77	69	61	52	43											
	0.5	0.5	0.6	0.6	0.6	0.7	0.7	0.7	0.7	0.7	0.7	0.6	0.6	0.6	0.5	0.4	0.3	0.1	-0.1	-0.3	-0.6	-0.9	-1.2					
58-S	327	290	258	231	206	185	167	150	135	122	110	99	90	81	72	62	53	45										
	0.8	0.8	0.9	0.9	1.0	1.0	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.0	1.0	0.9	0.8	0.7	0.5	0.4	0.3	0.2	0.0	-0.2	-0.5	-0.9	-1.3	
68-S	323	304	278	250	225	204	184	167	151	138	125	114	103	93	83	73	64	56	48									
	1.1	1.1	1.2	1.3	1.3	1.4	1.5	1.5	1.6	1.6	1.6	1.6	1.6	1.6	1.5	1.5	1.4	1.3	1.2	1.1	1.0	0.9	0.8	0.6	0.3	0.0	-0.3	-0.7
78-S	332	313	297	279	263	238	216	197	179	163	149	136	125	113	102	91	81	72	64									
	1.3	1.4	1.5	1.6	1.7	1.7	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.7	1.6	1.5	1.3	1.1	0.9	0.6	0.2	0.2	0.1	0.0	0.0	0.0	0.0	0.0

Strength based on strain compatibility; bottom tension limited to $6\sqrt{f'_c}$; see pages 2-3-2-6 for explanation.