


**Strand Pattern Designation  
76-S**




Safe loads shown include dead load of 10 psf for untopped members and 15 psf for topped members. Remainder is live load. Long-time cambers include superimposed dead load but do not include live load.

Capacity of sections of other configurations are similar. For precise values, see local hollow-core manufacturer.

Key  
 458 – Safe superimposed service load, psf  
 0.1 – Estimated camber at erection, in.  
 0.2 – Estimated long-time camber, in.

**HOLLOW-CORE  
4'-0" x 8"**  
Normal Weight Concrete

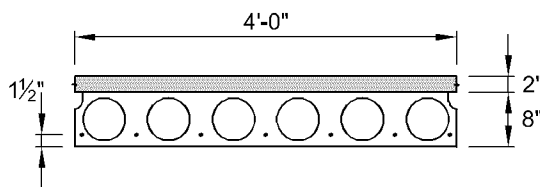

$f'_c = 5,000$  psi  
 $f_{pu} = 270,000$  psi

**Section Properties  
Untopped      Topped**

A =	215 in. <sup>2</sup>	311 in. <sup>2</sup>
I =	1,666 in. <sup>4</sup>	3,071 in. <sup>4</sup>
y <sub>b</sub> =	4.00 in.	5.29 in.
y <sub>t</sub> =	4.00 in.	4.71 in.
S <sub>b</sub> =	417 in. <sup>3</sup>	581 in. <sup>3</sup>
S <sub>t</sub> =	417 in. <sup>3</sup>	652 in. <sup>3</sup>
wt =	224 plf	324 plf
DL =	56 psf	81 psf
V/S =	1.92 in.	

**4HC8**

**Table of safe superimposed service load (psf) and cambers (in.)**

**No Topping**

Strand Designation Code	Span, ft																																																																																																											
	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40																																																																														
66-S	458	415	378	346	311	269	234	204	179	158	140	124	110	98	87	77	69	61	54	48	43	38	33	29	0.1	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.2	0.2	0.2	0.1	0.0	0.0	-0.1	-0.2	-0.3	-0.5	-0.6	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.2	0.1	0.0	-0.1	-0.2	-0.3	-0.5	-0.7	-0.9	-1.2	-1.4																																							
76-S	470	424	387	355	326	303	276	242	213	188	167	149	133	119	106	95	86	77	69	62	55	50	44	39	35	31	26	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.4	0.4	0.4	0.3	0.3	0.3	0.3	0.2	0.2	0.1	0.0	-0.1	-0.2	-0.4	-0.5	-0.7	-0.9	0.2	0.2	0.3	0.3	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.3	0.3	0.2	0.1	0.0	-0.1	-0.2	-0.4	-0.6	-0.8	-1.1	-1.4	-1.7	-2.0	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.2	0.2	0.1	0.0	-0.1	-0.2	-0.3	-0.5	-0.7	-0.9	-1.2	-1.6	-2.0	-2.4
58-S	464	421	384	352	323	300	280	260	244	229	211	194	177	160	144	130	118	107	97	88	80	72	66	60	54	48	42	37	32	28	0.2	0.2	0.3	0.3	0.3	0.4	0.4	0.5	0.5	0.5	0.5	0.6	0.6	0.6	0.6	0.6	0.6	0.5	0.5	0.5	0.4	0.3	0.2	0.1	0.0	-0.4	-0.3	-0.5	-0.7	-0.9	0.3	0.3	0.4	0.4	0.5	0.5	0.6	0.6	0.6	0.7	0.7	0.7	0.7	0.7	0.7	0.6	0.6	0.5	0.4	0.3	0.2	0.0	-0.2	-0.4	-0.6	-0.9	-1.2	-1.6	-2.0	-2.4																		
68-S	476	430	393	361	332	309	286	269	253	235	223	209	200	180	165	153	142	132	121	110	101	92	84	77	70	63	56	51	45	40	0.3	0.3	0.3	0.4	0.4	0.5	0.5	0.6	0.6	0.7	0.7	0.7	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.7	0.7	0.6	0.5	0.4	0.2	0.1	-0.1	-0.3	0.3	0.4	0.5	0.5	0.6	0.6	0.7	0.7	0.8	0.8	0.9	0.9	1.0	1.0	1.0	1.0	1.0	0.9	0.9	0.9	0.8	0.7	0.6	0.4	0.2	0.0	-0.2	-0.5	-0.8	-1.1	-1.5																
78-S	488	442	402	370	341	318	295	275	259	241	229	215	203	195	180	168	157	144	135	126	118	110	101	92	84	77	70	64	58	52	0.3	0.3	0.4	0.5	0.5	0.6	0.6	0.7	0.7	0.8	0.9	0.9	1.0	1.0	1.0	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.0	0.9	0.8	0.7	0.6	0.5	0.3	0.4	0.5	0.5	0.6	0.7	0.8	0.8	0.9	1.0	1.0	1.1	1.2	1.2	1.2	1.3	1.3	1.3	1.3	1.3	1.2	1.2	1.1	1.0	0.8	0.7	0.5	0.3	0.0	-0.3	-0.7	-1.0	-1.4	-1.8	-2.2												

**4HC8 + 2**

**Table of safe superimposed service load (psf) and cambers (in.)**

**2 in. Normal Weight Topping**

Strand Designation Code	Span, ft																																																																																	
	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40																																																						
66-S	489	445	394	340	294	256	224	197	173	153	135	119	105	93	82	68	56	45	36	26	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.2	0.2	0.2	0.2	0.1	0.0	-0.0	-0.1	-0.2	-0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.1	0.1	0.0	-0.1	-0.2	-0.3	-0.4	-0.6	-0.7	-0.9	-1.2	-1.4																						
76-S	498	457	420	387	347	304	267	235	208	184	164	146	130	116	103	88	74	62	51	41	31	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.4	0.4	0.4	0.3	0.3	0.3	0.2	0.2	0.1	-0.0	-0.1	-0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.2	0.2	0.2	0.1	0.0	-0.1	-0.2	-0.4	-0.5	-0.7	-0.9	-1.2	-1.4																						
58-S	492	451	414	384	357	333	310	293	274	245	219	196	177	159	143	126	110	95	82	70	59	49	40	32	0.3	0.3	0.3	0.4	0.4	0.5	0.5	0.5	0.5	0.6	0.6	0.6	0.6	0.6	0.5	0.5	0.5	0.1	0.3	0.2	0.1	0.0	-0.1	0.3	0.3	0.4	0.4	0.4	0.4	0.5	0.5	0.5	0.5	0.4	0.3	0.3	0.2	0.1	-0.1	-0.2	-0.4	-0.6	-0.9	-1.2	-1.5	-1.8												
68-S	463	426	393	366	342	319	299	282	267	251	239	216	195	177	158	140	124	110	97	84	73	62	53	44	36	28	0.4	0.4	0.5	0.5	0.6	0.6	0.7	0.7	0.7	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.7	0.7	0.6	0.5	0.4	0.2	0.1	-0.1	0.4	0.5	0.5	0.6	0.6	0.6	0.6	0.7	0.7	0.7	0.6	0.6	0.6	0.5	0.4	0.3	0.2	0.0	-0.2	-0.4	-0.6	-0.9	-1.2	-1.6	-2.0	-2.4				
78-S	472	435	402	375	348	325	305	288	273	257	245	232	220	207	186	167	149	133	119	106	94	83	73	64	55	46	38	0.5	0.5	0.6	0.6	0.7	0.7	0.8	0.9	0.9	1.0	1.0	1.0	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.0	0.9	0.9	0.7	0.6	0.5	0.3	0.5	0.6	0.6	0.7	0.7	0.8	0.8	0.9	0.9	0.9	0.9	0.9	0.8	0.8	0.7	0.7	0.6	0.4	0.3	0.1	-0.1	-0.3	-0.6	-0.9	-1.3	-1.7	-2.2

Strength is based on strain compatibility; bottom tension is limited to  $7.5\sqrt{f'_c}$ ; see pages 2-7 through 2-10 for explanation.