


AASHTO-PCI-ASBI Standard Segment For Balanced Cantilever Construction



2400-2

Deck Width mm	'A' mm	Area mm ²	W _t /3,000 mm kN	I _x m ⁴	Y _t mm
8,400	0	5,177,000	379	4.064	908
8,700	150	5,245,000	384	4.107	898
9,000	300	5,312,000	389	4.148	888
9,300	450	5,380,000	394	4.188	878
9,600	600	5,447,000	399	4.228	869
9,900	750	5,515,000	404	4.266	859
10,200	900	5,582,000	409	4.304	850
10,500	1,050	5,650,000	404	4.340	841
10,800	1,200	5,717,000	419	4.376	833
11,000	1,350	5,785,000	423	4.411	824
11,400	1,500	5,852,000	428	4.445	816

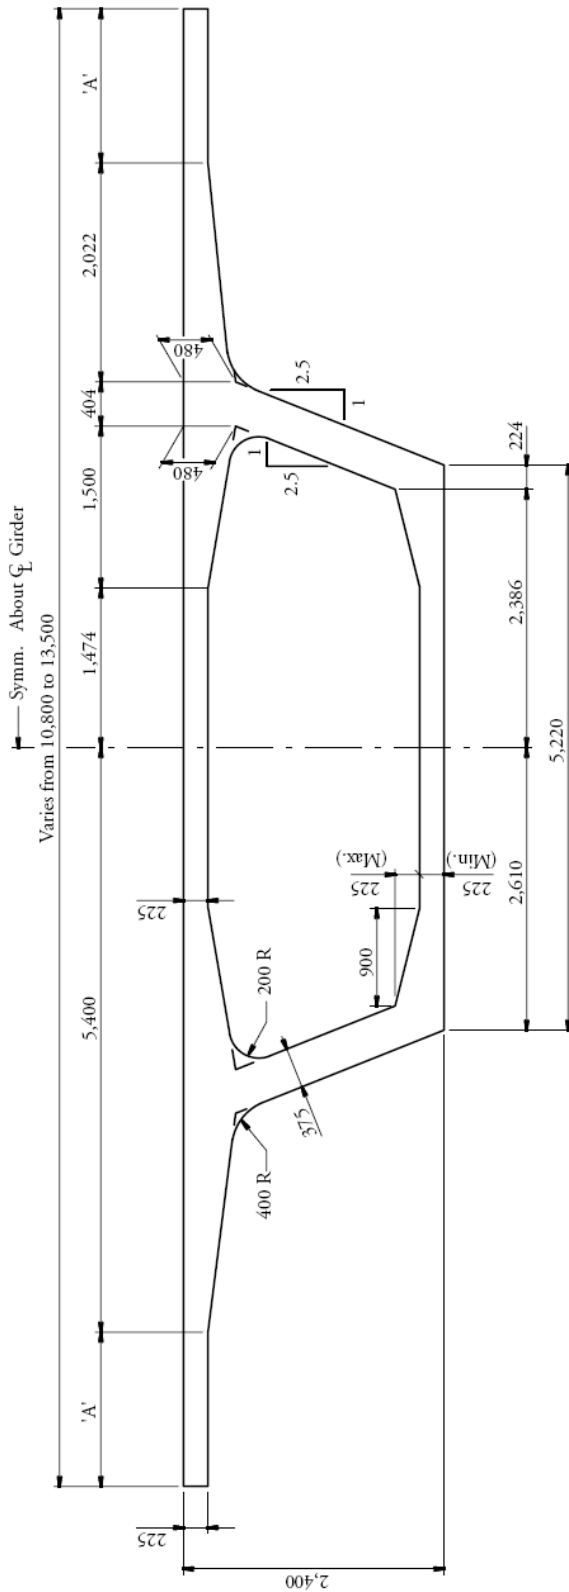