

ALSO FILL VOIDS SOLID AT  
NON-BAR LOCATIONS, (TYP)

BAR PLACED W/HOOK HORZ.

BENT BAR  
GROUTED INTO  
KEYWAY/VOID

BUTT JOINT 1:3 GROUT

LONGITUDINAL BAR  
AS REQUIRED

POCKET


1/8"x2" KOROLATH  
BRG PAD

PLANK CAMBER

FILL TOP  
COURSE SOLID

WALL REINFORCING

3" MIN. BEARING

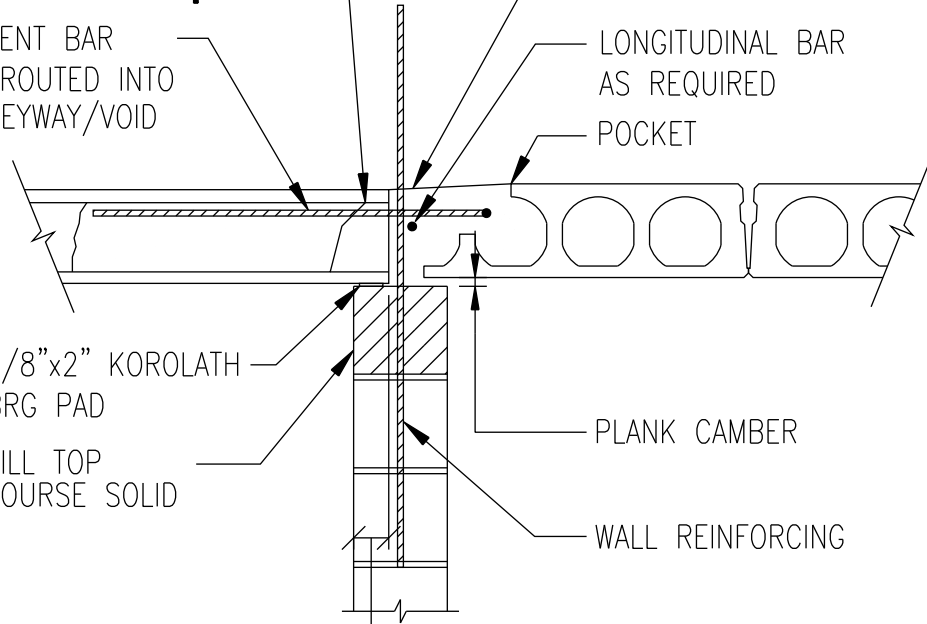

## INTERIOR CHANGE OF DIRECTION



A Chapter of the  
Precast/Prestressed Concrete Institute

RECOMMENDED HOLLOWCORE DETAILS

INTERIOR CHANGE OF DIRECTION

ISSUE DATE:

DETAIL NO.:

**HC-17.0**